

Simple harmonic motion

Introduction

When you suspend an object from a spring, the spring will stretch. If you gently pull on the object, which stretches the spring some more, then release it, the spring will provide a restoring force that will cause the object to oscillate in what is known as simple harmonic motion (SHM). In this experiment, you will examine this type of motion by studying the periodic motion experienced by a vertical mass attached to a spring. It can be described as a to-and-fro or vibrating type of motion for objects stretched or bent from their normal positions and then released. Such an object moves back and forth along a fixed path, repeating over and over this fixed series of motions and returning to each position and velocity after a definite period of time.

The conical harmonic motion spring used in this experiment is a truncated cone made of spring brass wire. Its elongations are closely proportional at applied forces. The windings of the truncated cone interfere less with each other than the windings of a helical spring which produces a truly sinusoidal motion.

Imagine a mass that is in equilibrium at the end of a spring that is hanging vertically from a support. If the mass is pulled down a small distance and released, the spring exerts a restoring force, $\vec{F} = -k\vec{x}$, where \vec{x} is the distance the spring is displaced from equilibrium and k is the spring constant of the spring. The negative sign indicates that the force is directed opposite to the direction of the displacement of the mass.

As the mass rises, its speed increases as it moves toward its equilibrium point. It continues to move above the equilibrium point and stops at a height where its potential energy closely matches the kinetic energy it had as it passed the equilibrium point. From this point it moves downward again, gaining speed as it falls. When it moves below the equilibrium point, it begins to stretch the spring again, and the pattern of motion is repeated.

For a mass on an ideal spring (spring has no mass), the position as a function of time is described by simple harmonic motion:

$$x(t) = A \cos(\omega t + \theta),$$

where A is the amplitude of the oscillations, ω is the angular frequency and θ is the phase constant. The angular frequency relates to the period of oscillation as $\omega = 2\pi/T$. The period of oscillation, T , for an object in simple harmonic motion depends on the mass, m , and the spring constant, k :

$$T = 2\pi \sqrt{\frac{m}{k}}.$$

As the mass oscillates up and down, its energy changes between kinetic and potential. If friction and drag are ignored, the total energy of the system is constant. However, since the spring itself has mass, a correction must be applied to the equation for the period of oscillation. The corrected equation is:

$$T = 2\pi \sqrt{\frac{m + \gamma m_s}{k}},$$

where m_s is the mass of the spring and γ is a constant between 0 and 1 which depends on the type of spring. The correction simply consists of using an effective mass that is the sum of the suspended mass and a fraction of the mass of the spring. For a regular uniform spring, the fraction γ is $1/3$. In this experiment, you will not only have to experimentally determine the value of the spring constant of the conical harmonic motion spring but also its γ value.

Suggested reading

Students taking	Suggested reading	
PHY 1121	Sections 14.1 to 14.3	Young, H. D., Freedman, R. A., <i>University Physics with Modern Physics, 13th edition</i> . Addison-Wesley (2012).
PHY 1321-1331	Sections 15.1 to 15.3	Serway, R. A., Jewett, J. W., <i>Physics for Scientists and Engineers with Modern Physics, eight edition</i> . Brooks/Cole (2010).
PHY 1124	Sections 15.1 to 15.4	Halliday, D., Resnick, R., Walker, J., <i>Fundamentals of Physics, 9th edition</i> . Wiley (2011).

Objectives

- ✓ Collect position vs. time data as a mass, hanging from a spring, is set in an oscillating motion.
- ✓ Determine the best fit equation for the position vs. time graph of an object undergoing simple harmonic motion (SHM).
- ✓ Relate the parameters in the best-fit equation for a position vs. time graph to their physical counterparts in the system.
- ✓ Compare the force constant of a conical harmonic spring obtained from static measurements with that found by a dynamic method.
- ✓ Estimate the correction factor, γ , to calculate the effective mass of the system for the conical harmonic spring.

Materials

- Computer equipped with *Logger Pro* and a Vernier computer interface
- Force sensor
- Motion detector and motion detector guard
- Table C-clamp with rod and clamp holders
- Harmonic spring
- Mass hanger and slotted masses set (5 x 100 g)
- Electronic balance (one per classroom)

Safety warnings

Never hang masses above the motion detector without using the motion detector guard. Dropping a mass on the detector could cause serious damage to the detector. Please also be careful to not overstretch the spring as you only need to observe small amplitude oscillations (a few centimeters is enough). When suspending masses to the spring, you should always hold the masses until you find the equilibrium point and then slightly pull them to start the oscillations (do not let the masses fall from an arbitrary point).

References for this manual

- Gastineau, J., Appel, K., Bakken, C., Sorensen, R., Vernier, D., *Physics with Vernier*. Vernier software and Technology (2007).
- Dukerich, L., *Advanced Physics with Vernier – Mechanics*. Vernier software and Technology (2011).
- *Physics with the Xplorer GLX*. PASCO scientific (2006).

Procedure

Preliminary manipulations

- Step 1.** Turn on your computer and launch the Logger Pro program. You should see a value for force as well as position in the bottom left corner.
- Step 2.** Prepare the setup presented in [Figure 1](#). Place the motion detector on the floor beneath the mass hanger. Place the wire basket over the motion detector to protect it. The motion detector's face should be directly under the hanging mass.
- Step 3.** Add 300 g to the mass hanger to stretch the spring and let it settle. Make sure the force sensor is set to 10N and is vertically aligned. If you rotate the force sensor, you should see the force reading in Logger Pro changing. The vertical alignment of the sensor is reached when the force you read is maximized.
- Step 4.** Click **Experiment** → **Zero...** to zero both sensors. Pull the hanger and mass slightly, then release. When the hanger is oscillating smoothly, begin collecting data. If the position-time graph does not appear to be a smooth curve, move the motion detector and repeat until you get a smooth curve. Once you are satisfied, make sure to not move the motion detector until the end of the experiment.
- Step 5.** Perform a sinusoidal fit of your position vs. time graph. To do so, click **Analyze** → **Curve Fit...**. Select **$A \cdot \sin(B \cdot t + C) + D$** from the general equation list. Click **Try Fit**, then **OK**.

This fit returns four parameters:

- **A:** the amplitude of the oscillations (in m);
- **B:** the angular frequency, ω , of the oscillations (in rad/s);
- **C:** the phase constant synchronizing your sinusoidal function with your oscillations;
- **D:** the offset parameter that is necessary when your equilibrium position is not the zero position of the motion detector.

- Step 6.** Perform the same fit for the velocity vs. time, the acceleration vs. time and the force vs. time graphs.
- Step 7.** Note the amplitude, the frequency and the phase parameters of your four fits in [Table 1](#) and answer the questions in the lab report section.

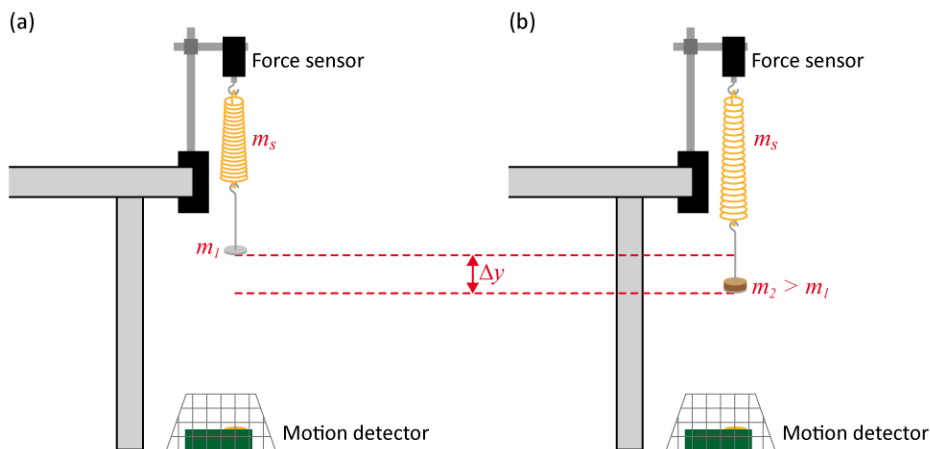


Figure 1 - Simple harmonic motion setup

Part 1 - Spring constant from static measurements

- Step 1.** Remove the 300 g from your mass hanger in order to have a setup as in [Figure 1a](#) (empty mass hanger).
- Step 2.** Click **Experiment** → **Zero...** to zero both sensors. For now on, the position measured with the motion detector will correspond to the displacement, Δy , as in [Figure 1](#) and the force reading will relate to the extra mass you will add to the mass hanger.
- Step 3.** Add 100 g to your mass hanger and let it settle. Click **Collect** to collect data for 10 s. Select the position vs. time graph and click **Analyze** → **Statistics**. Record the mean value in the information box as your average displacement, Δy , during the 10 s of data collection. Weigh the mass you added to the hanger and start filling [Table 2](#).
- Step 4.** Repeat the last step increasing the suspended mass by 100 g and complete filling [Table 2](#).
- Step 5.** Using Logger Pro, plot a graph (Graph 1) of the extending force (mg , with $g = 9.81\text{m/s}^2$) against the extension (Δy).
- Step 6.** Perform a linear regression and find the force constant, k , of the spring. **Print** your Graph 1 to a pdf file. Make sure you use the printer **CutePDF** to print the graph.
- Step 7.** We strongly recommend that you save all the work you do during the lab in case you need to review it later. Click **File** → **Save As...** to save your experiment file (suggested name: $k_static_YOUR_NAMES.cmb$). You can either send the file to yourself by email or save it on a USB key.

Part 2 - Spring constant from dynamic measurements

In the introduction, we learned that the period of oscillation is given by $T = 2\pi\sqrt{(m + \gamma m_s)/k}$. If we square this formula, we get:

$$T^2 = \frac{4\pi^2 m}{k} + \frac{4\pi^2 \gamma m_s}{k}.$$

In this part of the experiment, we will measure a series of oscillation periods squared, T^2 , as a function of the suspended masses, m . Using the equation above, you will be able to estimate the spring constant, k , from the slope of your graph and the correction factor, γ , from your y-intercept.

- Step 1.** Measure the weight of the mass hanger and the spring.
- Step 2.** Hang the mass hanger plus 100 g on the spring and let it settle. Pull the hanger and the weight slightly, then release. When the hanger is oscillating smoothly, begin collecting data.
- Step 3.** Perform a sinusoidal fit of your position vs. time graph.
- Step 4.** Record the total suspended mass (hanger + 100 g) and the angular frequency from your fit in [Table 3](#).
- Step 5.** Repeat the last three steps with increasing mass to complete [Table 3](#). Calculate the square periods starting from $T = 2\pi/\omega$.
- Step 6.** Prepare a graph (Graph 2) of the square period, T^2 , plotted against the total suspended mass, m .

Step 7. Perform a linear regression. Find the force constant, k , of the spring and the correction factor, γ . Print your Graph 2 to a pdf file (use the printer **CutePDF**). Save your experiment file (suggested name: *k_dynamic_YOUR_NAMES.cml*).

Part 3 - Amplitude vs. frequency of oscillations

Step 1. Using the mass hanger + 300 g, investigate the effect of the amplitude on the frequency of oscillations. Simply perform a series of fits with amplitudes (the parameter A of your fits) between ~ 0.01 m and ~ 0.1 m. Do not overstretch the spring. Note the amplitudes and the corresponding frequencies (the B parameter of your fits). Record your results in [Table 4](#).

Cleaning up your station

Step 1. Submit your graphs in Brightspace. If you locally saved your files, send them to yourself by email. Pick up your USB key if you used one to save your files. Turn off the computer.

Step 2. Put the masses, the mass hanger and the spring back on the table. Put the motion detector and the guard back on the table as well.

Step 3. Recycle scrap paper and throw away any garbage. Leave your station as clean as you can.

Step 4. Push back the monitor, keyboard and mouse. Also please push your chairs back under the table.